

Tradition meets contemporary



1 Coffee module

- Coffee module right
- Coffee module left
- Single or double coffee spout

2 Barista module

- Steam wand Autosteam Pro S3 on the left
- Hot water spout in the center
- Traditional steam wand S1 on the right
- Barista levers

3 Cleaning system

- EasyClean (EC): automatic cleaning system

Mytico Due options

- Third and fourth grinder
- Second steam wand as Autosteam Pro S3
- Back wall with lighting
- Coffee grounds ejection assembly

Franke Colors



The Mytico product line is not available in all markets.



Franke Kaffeemaschinen AG
cs-info.ch@franke.com

Franke Coffee Systems GmbH
cs-info.de@franke.com

Franke Coffee Systems Americas
cs-coffeesales.us@franke.com

Franke Coffee Systems UK
sales@frankecoffeesystems.co.uk

coffee.franke.com



MYTICO Due



Think classic Italian espresso machine revamped. Mytico Due provides the same coffee taste customers love with the benefits of contemporary design. A barista's favorite for its perceived values of ease of use, customization, and productivity, Mytico Due creates memorable coffee experiences that keep customers coming back. Getting high in-cup quality every time is effortless with iQFlow™ and individual brewing temperatures in two different brewing units.

CAPACITY*	SINGLE	PARALLEL
Espresso	190	335
Coffee	165	270
Hot water	23 l/h	

*Cups per hour according to DIN 18873



Compact height
Boosts customer interaction



Design
Traditional Italian design



iQFlow™
The groundbreaking technology that extracts more flavor for unrivaled in-cup quality



590.0697.071/06.23/CH-EN/Subject to dimensional, design and version changes.

Technical data

Machine	
Model	Due
Power	380–415 V 3LNPE 16 A, 50/60Hz, 4.6–5.2 kW
Dimensions	925 mm/610 mm/644 mm (W/H/D)
Weight (empty)	approx. 95 kg
Franke colors	Onyx, Cotton, Sand, Burgundy, Blueberry, Basil
Cleaning system	EasyClean

Water connection	
Water connection	Metal hose with union nut G3/8", L = 1500 mm
Water supply line	If possible on installation side: untreated water of drinking water quality (not from household decalcification system)
Water pressure	80–800 kPa (0.8–8.0 bar)
Flowrate	>0.1 l/sec
Water temperature	<25°C
Total hardness	4–8 °dH GH (German total hardness)/ 7–14 °fH GH (French total hardness)/ 70–140 ppm (mg/l)
Carbonate hardness	3–6 °dH KH (carbonate hardness)/ 50–105 ppm (mg/l)
Acid content/pH value	6.5–7.5 pH
Chlorine content	< 0.5 mg/l

Water drain	
Drain hose	Dia.= 19 mm, L = 2000 mm

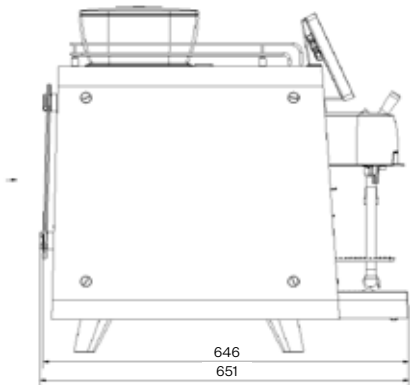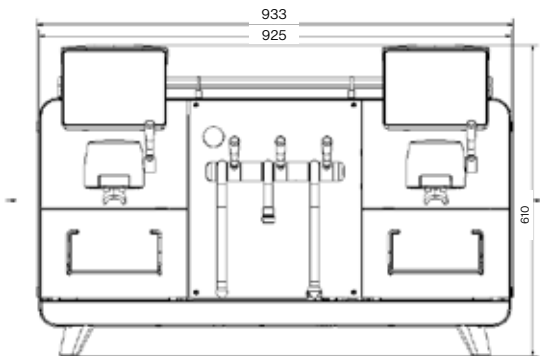

*Fuse varies by country